

合肥长源液压股份有限公司

公司地址：中国安徽省合肥市当涂北路瑶海工业园珍珠路

传真：+86-551-64391155
国内市场电话：4008-123-910
+86-551-64391100 +86-551-64391122
邮箱：sale@hchc.cn

国际市场电话：+86-551-64396718
邮箱：export01@hchc.cn
售后支持热线：400-887-9946

相关链接：
<http://ahhchc.en.alibaba.com>
<https://ahhchc.1688.com>
<http://ahhchc.en.made-in-china.com>

Hefei Changyuan Hydraulic CO.,LTD.

Company address: Yaohai Industrial Park,North Dangtu Road,Hefei,China

Fax: +86-551-64391155
Domestic market telephone: 4008-123-910
+86-551-64391100 +86-551-64391122
E-mail: sale@hchc.cn

International market Tel.: +86-551-64396718
E-mail: export01@hchc.cn
After service : 400-887-9946

Related links:
<http://ahhchc.en.alibaba.com>
<https://ahhchc.1688.com>
<http://ahhchc.en.made-in-china.com>

www.hchc.cn



长源液压公众号



官网二维码



农业机械常用液压元件

HYDRAULIC COMPONENTS IN AGRICULTURAL MACHINERY



关于长源液压

ABOUT HCHC

公司成立于1966年,主要产品包括液压泵、液压马达、液压阀、液压油缸和液压系统及控制等五大类。产品全产业链高度自主,具有铸造、锻造、热处理、电镀、喷涂、核心材料研究及核心零部件加工制造等能力,总占地约300余亩。产品共200多个系列、4500余种规格,具有较强的综合配套供应和服务能力。总年产量可达200多万台。产品广泛应用于工业车辆(叉车)、工程机械、专用车辆、现代农业机械及其它非移动领域等。

Founded in 1966, the company's main products include hydraulic pumps, hydraulic motors, hydraulic valves, hydraulic cylinders, hydraulic systems and controls. The whole industrial chain of the product is highly independent, with the capabilities of casting, forging, heat treatment, electroplating, spraying, core material research and core parts processing and manufacturing, covering a total area of about 300 acres. There are more than 200 series and more than 4,500 specifications of the products, which have strong comprehensive supporting supply and service capabilities. The total annual output can reach more than 2 million units. The products are widely used in industrial vehicles (forklifts), construction machinery, special vehicles, modern agricultural machinery and other non-mobile fields.



公司荣誉 | COMPANY HONORS



推荐产品 | RECOMMENDED PRODUCTS



CBHZ 系列铸铁齿轮油泵
SERIES CAST IRON GEAR OIL PUMP



CBTZTA/FA-F 系列铸铁齿轮油泵
SERIES CAST IRON GEAR OIL PUMP



CBKETL 系列铸铁齿轮油泵
SERIES CAST IRON GEAR OIL PUMP



HCDF-15 系列多路换向阀
DIRECTIONAL VALVE



DTS 电比例阀
ELECTRIC PROPORTIONAL VALVE



HCZFG 系列电液助力制动阀
SERIES HYDRAULIC BOOSTER BRAKE VALVE



CBKETL 铸铁 Cast Iron

公称排量 NOMINA DISPLACEMENT:8-40mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2000r/min
转速范围 SPEED RANGE:800-2500r/min
* 轴向间隙自动补偿机构
* 整体刚性强,耐冲击性好,噪音低,前后泵不串油
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* STRONG OVERALL RIGIDITY,GOOD IMPACT RESISTANCE ,LOW NOISE ,THE FRONT AND REAR PUMPS DO NOT STRING OIL.



CBTZTA/FA-F 铸铁 Cast Iron

公称排量 NOMINA DISPLACEMENT:4-20mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2000r/min
转速范围 SPEED RANGE:800-2500r/min
* 轴向间隙自动补偿机构
* 整体刚性强,耐冲击性好,噪音低
* 复合安全阀,简化系统
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* STRONG OVERALL RIGIDITY,GOOD IMPACT RESISTANCE ,LOW NOISE
* PATENT STRUCTURE,GOOD STARTING PERFORMANCE.



CBWL-E3/E3 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:4-20mL/r
额定压力 RATED PRESSURE:16/16MPa
最高压力 MAX.PRESSURE:20/20MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:600-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料,具有较高的功率密度比
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.



ZDa5a-10 系列整体式多路阀 MONOBLOCK VALVE

公称压力 NOMINA PRESSURE:25MPa
公称流量 NOMINA FLOW RATE:40L/min
阀杆行程 SPOOL STROKE:5+5mm
* 适用于中小马力拖拉机
* SUITABLE FOR SMALL AND MEDIUM HORSEPOWER TRACTORS.



HCZFG 系列液压助力制动阀 SERIES HYDRAULIC BOOSTER BRAKE VALVE

公称压力 NOMINA PRESSURE:16MPa
公称流量 NOMINA FLOW RATE:15L/min
助力比 BOOSTER RATIO: 6.15:1
* 有效降低制动踏板操纵力,单控制互不影响
* 可实现单边制动,适用于大马力拖拉机
* EFFECTIVELY REDUCE THE BRAKE PEDAL OPERATION FORCE, SINGLE-CHAMBER BRAKING DOES NOT AFFECT EACH OTHER
* CAN ACHIEVE SINGLE-SIDE BRAKING, SUITABLE FOR HIGH-HORSEPOWER TRACTORS



FP6G 单阀分配器 SINGLE VALVE DISTRIBUTOR

公称压力 NOMINA PRESSURE:25MPa
公称流量 NOMINA FLOW RATE:90L/min
阀杆行程 SPOOL STROKE:9+8+7mm
* 适用于全马力段拖拉机提升器
* SUITABLE FOR ALL-POWER TRACTOR HOIST.



CBQT 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT: 前泵 8-63mL/r
后泵 6-25mL/r
额定压力 RATED PRESSURE:16/20MPa
最高压力 MAX.PRESSURE:20/25MPa
额定转速 RATED SPEED:2000/2500r/min
转速范围 SPEED RANGE:600-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料,具有较高的功率密度比
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.

HCHC[®] 长源液压

拖拉机常用液压元件

HYDRAULIC COMPONENTS IN TRACTORS



液压泵/马达 GEAR PUMP/MOTOR



液压阀 HYDRAULIC VALVE



液压油缸 HYDRAULIC CYLINDER



HCDF-15 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINA PRESSURE:31.5MPa
公称流量 NOMINA FLOW RATE:80L/min
跳位压力 HOPPING PRESSURE:17.5~20MPa可调
阀芯行程 SPOOL STROKE:Q型6+6+6mm
O型7+7mm
* 体积小,流量大,可实现电液控制,提升口内置液压锁,适用于中大马力拖拉机
* SMALL SIZE, LARGE FLOW, CAN REALIZE ELECTRO-HYDRAULIC CONTROL, BUILT-IN HYDRAULIC LOCK AT THE LIFTING PORT, SUITABLE FOR MEDIUM AND LARGE HORSEPOWER TRACTORS



DLSG*-20 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINA PRESSURE:25MPa
公称流量 NOMINA FLOW RATE:100L/min
阀杆行程 SPOOL STROKE:O型7+7mm Q型7+7+7mm
阀芯直径 THE VALVE CORE DIAMETER:Ø19
* 提升器联A口集成整体式机械锁,
提升自动复位,适用于大马力拖拉机
* INTEGRATED MECHANICAL LOCK FOR LIFTER JOINT A PORT,LIFTING AUTOMATIC RESET, SUITABLE FOR MEDIUM AND HIGH POWER TRACTORS.



DTS 电比例阀 ELECTRIC PROPORTIONAL VALVE

公称压力 NOMINA PRESSURE:31.5MPa
公称流量 NOMINA FLOW RATE:120L/min
控制电压 CONTROL VOLTAGE:DC12V/DC24V
* 提升口流量仅与控制电流成比例
* 阀前补偿,不受负载压力影响,力位综合调节,适用大马力拖拉机
* THE FLOW RATE AT THE LIFTING PORT IS ONLY PROPORTIONAL TO THE CONTROL CURRENT
* THE PRE-VALVE COMPENSATION IS NOT AFFECTED BY THE LOAD PRESSURE, AND THE FORCE AND POSITION ARE ADJUSTED COMPREHENSIVELY, WHICH IS SUITABLE FOR HIGH-HORSEPOWER TRACTORS.



DLSG5-20 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINA PRESSURE:25MPa
公称流量 NOMINA FLOW RATE:100L/min
阀杆行程 SPOOL STROKE:O型7+7mm
Q型7+7+7mm
阀芯直径 THE VALVE CORE DIAMETER:Ø19
* 适用于中大马力拖拉机
* SUITABLE FOR MEDIUM AND HIGH POWER TRACTORS.



CBTL 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:10-30/10-16mL/r
额定压力 RATED PRESSURE:16/20MPa
最高压力 MAX.PRESSURE:20/25MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:600-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料,具有较高的功率密度比
* 前后盖为铸铁
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.
* THE FRONT AND REAR COVERS ARE CAST IRON



*本册所列为农机行业部分常用产品,如有其它需求请联系我们。

*Only listed some products commonly applied in the tractors here, if you have other requirements, please contact us.



CBTLZTA-F/F 铸铁 Cast Iron

公称排量 NOMINA DISPLACEMENT:6-40mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2000r/min
转速范围 SPEED RANGE:800-2500r/min
* 轴向间隙自动补偿机构
* 整体刚性强,耐冲击性好,噪音低
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* STRONG OVERALL RIGIDITY, GOOD IMPACT RESISTANCE ,LOW NOISE



DYEDL-F20L 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINA PRESSURE:31.5MPa
公称流量 NOMINA FLOW RATE:100L/min
控制电压 SPOOL STROKE:DC24V/12V
* 主要应用于大马力拖拉机
可远程电动控制也可近距离手动操纵
配置电比例电磁阀块控制提升器
* MAINLY USED IN HIGH-HORSEPOWER TRACTORS, WHICH CAN BE REMOTELY CONTROLLED BY ELECTRIC MANUALLY OPERATED AT CLOSE RANGE, EQUIPPED WITH ELECTRIC PROPORTIONAL SOLENOID VALVE BLOCK TO CONTROL THE LIFTER




DF28-15 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINA PRESSURE:25MPa
公称流量 NOMINA FLOW RATE:50L/min
阀杆行程 SPOOL STROKE:O型5+5mm
Q型6.5+6.5+4mm
阀芯直径 THE VALVE CORE DIAMETER:Ø16
* 提升器联B口集成整体式机械锁,
适用于中大马力拖拉机
* INTEGRATED MECHANICAL LOCK FOR LIFTER JOINT B PORT, SUITABLE FOR MEDIUM AND HIGH POWER TRACTORS.



CBTZTA-F 铸铁 Cast Iron

公称排量 NOMINA DISPLACEMENT:8-40mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2000r/min
转速范围 SPEED RANGE:800-2500r/min
* 轴向间隙自动补偿机构
* 整体刚性强,耐冲击性好,噪音低
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* STRONG OVERALL RIGIDITY, GOOD IMPACT RESISTANCE ,LOW NOISE

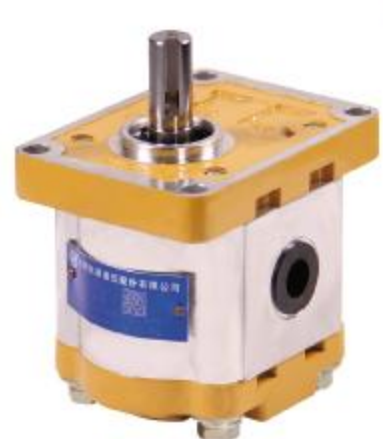

CBW-*3 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:4-20mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:800-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料,具有较高的功率密度比
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.



CBHZ 铸铁 Cast Iron

公称排量 NOMINA DISPLACEMENT:23-36mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:600-3000r/min
* 轴向间隙自动补偿机构,齿形修行
* 整体刚性强,耐冲击性好,噪音低
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM, TOOTH SHAPE MODIFICATION.
* STRONG OVERALL RIGIDITY, GOOD IMPACT RESISTANCE ,LOW NOISE



CBTLAW 铝制/铸铁 Aluminium/Cast Iron

公称排量 NOMINA DISPLACEMENT: 前泵 6-32mL/r
后泵 6-16mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:600-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料,具有较高的功率密度比
* 前后泵不串油,前后盖为铸铁
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.



ZDF-15 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINA PRESSURE:35MPa
公称流量 NOMINA FLOW RATE:80L/min
阀杆行程 SPOOL STROKE:O型5+5mm
Q型5+5+5mm
* 适用于中大型马力拖拉机
* SUITABLE FOR MEDIUM AND HIGH POWER TRACTORS.



DLS22-20 系列多路换向阀 DIRECTIONAL VALVE

公称压力 NOMINA PRESSURE:25MPa
公称流量 NOMINA FLOW RATE:100L/min
阀杆行程 SPOOL STROKE:O型7+7mm
Q型7+7+7mm
* 提升器联B口集成整体式机械锁,
适用于中大马力拖拉机
* INTEGRATED MECHANICAL LOCK FOR LIFTER JOINT B PORT, SUITABLE FOR MEDIUM AND HIGH POWER TRACTORS.



CBWC 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:8mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:800-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料, 具有较高的功率密度比
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.



CBWKF 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:16mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:800-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料, 具有较高的功率密度比
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.



CMW-F 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:4-20mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:800-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料, 具有较高的功率密度比
* 专利结构, 启动性能好, 噪音低
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.
* PATENT STRUCTURE,GOOD STARTING PERFORMANCE,LOW NOISE



EDCF06 电控阀

ELECTRIC VALVE
最大进口流量 MAX.INLET FLOW:60L/min
最大工作压力 MAX. WORKING PRESSURE :215bar
控制电压 SPOOL STROKE:DC24V/12V
A1、B1 口平衡阀特性 BALANCING VALVE CHARACTER OF
A1,B1:80bar@5L/min 电源电压 POWER VOLTAGE:12
VDC
比例阀线圈阻抗, PROPORTIONAL VALVE COILIMPED-
ANCE:7.2 Ohm@20°C
保护等级 PROTECTION CLASS:IP 67
* 实现电动控制
* REALIZE ELECTRIC CONTROL



DCF 系列多路换向阀

DIRECTIONAL VALVE
公称压力 NOMINA PRESSURE:31.5MPa
公称流量 NOMINA FLOW RATE:50L/min
控制电压 SPOOL STROKE:DC24V/DC12V
* 整体式零泄漏液压锁, 电磁线圈直推
阀芯, 耐污染直动式溢流阀
* INTEGRAL ZERO-LEAKAGE HYDRAULIC LOCK,SOLENOID
COIL PUSHES VALVE CORE DIRECTLY,CONTAMINATION-
RESISTANT DIRECT-ACTING OVERFLOW VALVE



CBHB-F5 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:8-63mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:600-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料, 具有较高的功率密度比
* 铸铁端盖, 专利结构 耐冲击
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.
* CAST IRON END CAP,PATENTED STRUCTURE IMPACT RESISTANCE.

HCHC[®] 长源液压

收获机常用液压元件
HYDRAULIC COMPONENTS IN HARVESTERS



液压泵/马达 GEAR PUMP/MOTOR



液压阀 HYDRAULIC VALVE



液压油缸 HYDRAULIC CYLINDER



*本册所列为农机行业部分常用产品, 如有其它需求请联系我们。
*Only listed some products commonly applied in the harvesters here, if you have other requirements,
please contact us.



CBWXD/FB 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:4-20mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:800-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料, 具有较高的功率密度比
* 内置溢流阀, 实现恒定流量输出
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.
* BUILT-IN RELIEF VALVE FOR CONSTANT FLOW OUTPUT.



CBW-*3 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:4-20mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:800-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料, 具有较高的功率密度比
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.



CBTL 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:10-30/10-16mL/r
额定压力 RATED PRESSURE:16/20MPa
最高压力 MAX.PRESSURE:20/25MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:600-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料, 具有较高的功率密度比
* 前后盖为铸铁
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.
* FRONT AND REAR COVERS ARE CAST IRON.



CBWL-E3/E3 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:4-20mL/r
额定压力 RATED PRESSURE:16/16MPa
最高压力 MAX.PRESSURE:20/20MPa
额定转速 RATED SPEED:2500r/min
转速范围 SPEED RANGE:600-3000r/min
* 轴向间隙自动补偿机构
* 高强度材料, 具有较高的功率密度比
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.



CBWLKC-E3/E3 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:6-20mL/r
额定压力 RATED PRESSURE:16MPa
最高压力 MAX.PRESSURE:20MPa
额定转速 RATED SPEED:2000r/min
转速范围 SPEED RANGE:1350-2500r/min
* 轴向间隙自动补偿机构
* 高强度材料, 具有较高的功率密度比
* 齿形修形, 低噪音
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.
* TOOTH SHAPE MODIFICATION, LOW NOISE.



CBWLKG-F 铝制 Aluminium

公称排量 NOMINA DISPLACEMENT:4-10mL/r
额定压力 RATED PRESSURE:20MPa
最高压力 MAX.PRESSURE:25MPa
额定转速 RATED SPEED:1500r/min
转速范围 SPEED RANGE:800-1800r/min
* 轴向间隙自动补偿机构
* 高强度材料, 具有较高的功率密度比
* 齿形修形, 低噪音
* AXIAL CLEARANCE AUTOMATIC COMPENSATION MECHANISM.
* HIGH STRONG MATERIAL,WITH HIGHER POWER DENSITY RATIO.
* TOOTH SHAPE MODIFICATION, LOW NOISE.



HCFK* 液压集成阀块

HYDRAULIC BLOCK VALVE
公称压力 NOMINA PRESSURE:31.5MPa
公称流量 NOMINA FLOW RATE:50L/min
* 整体式零泄漏液压锁, 阀体为高强度
球墨铸铁, 大流量电磁泄荷阀
* INTEGRAL ZERO-LEAKAGE HYDRAULIC LOCK,THE VALVE BODY
MATERIAL IS HIGH STRENGTH DUCTILE CAST IRON
LARGE FLOW SOLENOID DISCHARGE VALVE



* 支持定制 CUSTOMISED



DYDLa-15 系列电液多路换向阀

ELECTRIC HYDRAULIC VALVE
公称压力 NOMINA PRESSURE:31.5MPa
公称流量 NOMINA FLOW RATE:65L/min
阀杆行程 SPOOL STROKE:7+7mm
* 整体式零泄漏液压锁, 电液先导控制
* INTEGRAL ZERO-LEAKAGE HYDRAULIC LOCK,
ELECTRO-HYDRAULIC PILOT CONTROL



DLS-F15 系列多路换向阀

DIRECTIONAL VALVE
公称压力 NOMINA PRESSURE:20MPa
公称流量 NOMINA FLOW RATE:50L/min
阀杆行程 SPOOL STROKE:7.5+7.5mm
* 整体式零泄漏液压锁, 耐污染直动
式溢流阀
* INTEGRAL ZERO-LEAKAGE HYDRAULIC LOCK,
CONTAMINATION-RESISTANT DIRECT-ACTING RELIEF VALVE



ZS-L10 系列多路换向阀

DIRECTIONAL VALVE
公称压力 NOMINA PRESSURE:20MPa
公称流量 NOMINA FLOW RATE:40L/min
阀杆行程 SPOOL STROKE:7+7mm
* 可配置各种插装阀
* VARIOUS CARTRIDGE VALVES CAN BE CONFIGURED